



## ON THE FOCUSING OF ULTRASONIC WAVES IN COMPLEX MEDIA

Ligia MUNTEANU<sup>\*</sup>, Luciana MAJERCSIK<sup>\*\*</sup>

<sup>\*</sup> Institute of Solid Mechanics, Romanian Academy

<sup>\*\*</sup> Technical University of Civil Engineering, Bucharest

Corresponding author: Ligia MUNTEANU, E-mail: [ligia\\_munteanu@hotmail.com](mailto:ligia_munteanu@hotmail.com)

**Abstract** The paper is concerned with the focusing of ultrasonic waves in complex media at the femtosecond temporal and nano-meter spatial scale. Focusing and self-focusing are properties of waves experimentally observed, and their balance depends on the nanoscale properties of the medium. These properties are investigated by using the couple stresses theory and the double couple radiation pattern.

**Key words:** Ultrasonic waves, focusing and self-focusing, femtosecond temporal and nano-meter spatial scale.

### 1. INTRODUCTION

Classical elasto-dynamic theories consider that material bodies possess continuous mass densities and laws of motion and axioms of constitution are valid for every part of the body no matter how small they may be. The classical continuum theory is believed to be inadequate for the treatment of propagation of waves in materials with nanostructure the characteristic length scale of which is in the order of a few nanometers. They include the nanocrystalline materials such as ceramic, carbon nanotubes, nanofibers and wires, etc. These materials, be metal, ceramic or polymers, are nanometer size particles, and can be engineered by controlling the sizes of the building blocks in the 1-100nm size range and their assembly. The microstructure refers to the arrangement of the atoms and the size of a solid in 1D, 2D and 3D. Effects controlling the properties of nanostructured materials include size effects, where critical length scales of physical phenomena become comparable with the characteristic size of the building blocks of the microstructure [1–4].

In the last decades a class of materials with a nanometer-sized microstructure have been synthesized and studied. These materials are nanocomposites that improve the macroscopic properties of products. Typically, nanocomposites are clay, polymer or carbon, or a combination of these materials with nanoparticle building blocks [5]. By integrating nanotubes into traditional materials (epoxy matrices) it is possible to improve their strength and damping properties. Nanocomposites have a reduced weight and volume, in comparison to polymeric damping materials, and have high damping capabilities. Since their discovery in 1991, the carbon nanotubes offer an interesting combination of light and stiff, of high strength and damping. Since the carbon nanotubes are so thin, they possess a big amount of surface area for the volume they occupy ( $10^3 \text{ m}^2/\text{gm}$ ), giving them a great capacity to dissipate energy [6]. Carbon nanotubes are up to 100 times stronger than steel at only a sixth the weight, and have attracted much research as potential to improve the strength of composite materials. The effect of structure in nanocomposites becomes important in

transmitting waves of small wavelength and high frequency. When the wavelength is comparable with the average grain size, the motion of the grains must be taken into account [7]. Models of media with couple stresses [8-13], and the double couple radiation pattern [14, 15] can be used to describe this category of materials with extra independent internal degrees of freedom for the local rotations. The radiation force acts upon the body likewise a friction force. The rate of work of this force is equals to the radiation of energy that leaves acoustically the body per unit time.

The constituents like grains and molecules are allowed to rotate independently without stretch. The behavior of waves in such media exhibits new features as dispersion, concentration and focusing [16, 17].

The waves interact with matter inducing a wide range of nonlinear effects, experimentally observed such as generation of high energy local fields by focusing and self-focusing phenomena [18].

The paper is concerned with the focusing of ultrasonic waves in nanostructured media at the femtosecond ( $10^{-15}$  s) temporal and nanometer spatial scale ( $10^{-9}$  m). The media considered are dissipative. The focusing phenomenon consists in a nano narrow beam of nonlinear ultrasonic wave, which can focus. The self-focusing consists in a generation of new waves, which is appearing at some distances, due to interaction between stable and unstable waves. Self-focusing could be observed in nano-piezo-semiconductors [18]. These properties are investigated in this work by using the couple stresses theory and the double couple radiation pattern.

## 2. FORMULATION OF THE PROBLEM

Since size is important in nano-elasto-dynamics, the ratio of surface area to volume is large for small systems, that means  $(V^{2/3}/V) = 1/V^{1/3}$  becomes smaller and smaller as  $V$  grows. The surface effects dominate in the nanostructures in contrast to the macroscopic state. In crystallography for example, the transition to the nanoscale appears for  $V/V_c < 10^6$ , where  $V$  is the volume of crystallites in the solid and  $V_c$  is the unit cell volume. This volume ratio can be converted in to a ratio for the number of particles by substituting the number of atoms per unit cell. In Bravais lattices, this number rarely exceeds four. It leads to the ratio of  $N/N_c < 10^4$ , which seems to be obeyed by Bose-Einstein condensates that occur only when  $N \geq 10^4$ . The transition to bulk behavior can be taken for  $N/N_c > 10^5$  [19].

To model the behavior of a nanocrystalline medium, we start with considering that the micromedium is composed from microvolumes  $V_m$  enclosed within its surface in the medium, and each microvolume contains discrete nano-volumes  $V_n$ , with  $V_m/V_n < 10^6$ . The nanovolumes are similar to what is observed experimentally, i.e. 8–64 grains in a  $10.6 \text{ nm}^3$  of material, with a grain modeled as a sphere with diameter of 3.3–6.6 nm. Consider that the medium has the initial volume  $V_0$  and surface  $S_0$  in its undeformed and unstressed state, and the properties of  $V_m$  are averaged discrete microvolumes properties. If the physical phenomenon under study has a certain characteristic length such as wavelength, comparable with the size of  $V_n$  in the body, then the nanostructure of the material must be taken into consideration. The state of deformation of such a body in the rectangular frame of reference  $x_k$ ,  $k = 1, 2, 3$  is described by two tensors

$$e_{kl} = \frac{1}{2}(u_{k,l} + u_{l,k} + u_{i,k}u_{i,l}), \quad (1)$$

$$\Gamma_{klm} = -u_{l,km}, \quad i, k, l, m = 1, 2, 3, \quad (2)$$

where  $e_{kl}$  are components of the Green's strain tensor which characterizes relative displacements of centers of mass of microvolumes  $V_m$ ,  $\Gamma_{klm}$  components of the nano-deformation gradient which characterizes relative displacements of nano-volumes of the same microvolume, and  $u_k(x_k, t')$  components of the displacement vector, in Lagrangian variables. A subscript after a comma means differentiation with respect to the indicated coordinate.

To derive basic equations of nano-elasto-dynamics we define the action functional

$$I = \int_{t'_1}^{t'_2} dt \int_{V_0} L dV_0, \quad (3)$$

where the Lagrangian  $L$  of the medium is given by

$$L = K - \rho_0 U, \quad (4)$$

with the kinetic energy  $K$  and the potential energy  $\rho_0 U$  expressed as

$$K = \frac{1}{2} \rho_0 \dot{u}_i^2, \quad (5)$$

$$\rho_0 U = \frac{\lambda}{2} e_{kk}^2 + \mu e_{ik}^2 + 2\mu M^2 (\Gamma_{klm}^2 + \nu \Gamma_{kim} \Gamma_{ikm}) + \frac{A}{3} e_{ik} e_{il} e_{kl} + B e_{ik}^2 e_{ll} + \frac{C}{3} e_{kk}^3, \quad (6)$$

with  $i, k, l, m = 1, 2, 3$ , and  $\rho_0$  the density of the body in the initial state. Here  $\lambda, \mu$  are Lamé second-order elastic constants,  $A, B, C$  third-order Landau constants, and  $M, \nu$  nanostructure constants (characterize the rotation and the gradient of rotation of internal degree of freedom), which can be positive or negative. Determination of elastic constants can be performed directly, from their definition as second and third order derivatives of the total energy per unit cell or nano-volume with respect to strain. The calculations are based on the Berruti and Delsanto approach [20]. The pseudopotential energy consists in writing the total crystal energy as a sum of several contributions [21]

$$E = \rho_0 U = E_{es} + E_{fe} + E_{be} + E_r, \quad (7)$$

where  $E_{es}$  represents the electrostatic Coulomb energy of positive point charges in the uniform negative charge background (the Madelung energy),  $E_{fe}$  is the free electron energy, which depends on the crystal volume,  $E_{be}$  is the band structure energy and  $E_r$  the ion-core (Born-Mayer) repulsive energy. From calculations, it was concluded that  $E_r$  (expressed as  $E_r = 0.5\alpha \sum_n \exp(-\beta R^{(n)})$ , where  $\alpha$  is the repulsive energy parameter and  $\beta$  is the repulsive range parameter) is the predominant term for calculations of the material constants [22]. The sum is extended to all the nearest neighbors, which are located at distances  $R^{(n)}$ .

We assume that nanostrain effects are weak and only squared terms in  $\Gamma_{klm}$  are included in (6). The balance of momentum, the balance of moment of momentum and the conservation of energy are obtained from extremum conditions of the functional (3). The equation of motion including the mechanical radiation has the form

$$\rho_0 (\ddot{u}_i + \tau \ddot{\ddot{u}}_i) = \frac{\partial}{\partial x_k} \left[ \frac{\partial \rho_0 U}{\partial u_{i,k}} - \frac{\partial}{\partial x_m} \left( \frac{\partial \rho_0 U}{\partial u_{i,km}} \right) \right], \quad (8)$$

where  $\tau$  is the radiation time  $0 \leq \tau \leq 1$ . The state of stresses of the medium is given by

$$\sigma_{kl} = \frac{\partial \rho_0 U}{\partial u_{l,k}}, \quad \sigma_{klm} = \frac{\partial \rho_0 U}{\partial \Gamma_{klm}}, \quad k, l, m = 1, 2, 3, \quad (9)$$

where  $\sigma_{kl}$  is the microstress tensor and  $\sigma_{klm}$  the nanostress tensor. The antisymmetric part of  $\sigma_{klm}$  is the tensor of couple stresses. The energy transport equation is

$$\dot{W} + \text{div } S = 0, \quad W = \frac{1}{2} \rho_0 \dot{u}_i^2 - \rho_0 U, \quad (10)$$

where  $W$  is the internal energy density, and

$$S_j = \frac{\partial \rho_0 U}{\partial u_{i,j}} \dot{u}_i - \frac{\partial \rho_0 U}{\partial u_{i,kj}} \dot{u}_{i,k} + \frac{\partial}{\partial x_k} \left[ \frac{\partial \rho_0 U}{\partial u_{i,kj}} \right] \dot{u}_i, \quad (11)$$

are components of the energy flux density or Poynting vector. The momentum transport equation is given by

$$\dot{G} + \text{div } T = 0, \quad G_m = -\dot{u}_i u_{i,m}, \quad (12)$$

where  $G_m$  are components of the wave momentum vector, and

$$T_{mj} = \delta_{mj} \left( \frac{1}{2} \dot{u}_i^2 - \rho_0 U \right) + \frac{\partial \rho_0 U}{\partial u_{i,j}} u_{i,m} + \frac{\partial \rho_0 U}{\partial u_{i,lj}} u_{i,lm} - \frac{\partial}{\partial x_k} \left[ \frac{\partial \rho_0 U}{\partial u_{i,lj}} \right] u_{i,m} \quad (13)$$

are components of the momentum flux density tensor or the radiation stress tensor. Equations (10) and (12) are important dynamic characteristics of waves. Summation is made over repeated subscripts and  $\delta_{nj}$  is the Kronecker delta symbol.

As an example, if consider the plane longitudinal elastic waves in the  $x_1$  direction with vanishing body loads, described by (8) with  $u = [u(x, \tau), 0, 0]$ . By substituting (1), (2), (6) into (7) we obtain the motion equation in displacements

$$\ddot{u} + \tau \ddot{u} - u_{xx} + \beta u_{xxxx} = \alpha u_x u_{xx}, \quad (14)$$

where

$$u = \frac{u_1}{\varepsilon_0 \Lambda d}, \quad x = \frac{x_1}{\Lambda d}, \quad t = \frac{c_1 t'}{\Lambda d} \quad (15)$$

are dimensionless variables. Here  $\varepsilon_0 \in [10^{-7}, 10^{-6}]$  is a characteristic value of the elastic strains,  $c_1^2 = \frac{\lambda + 2\mu}{\rho_0}$  the characteristic longitudinal wave velocity in the material,  $\Lambda = \frac{L}{d}$  the dimensionless wave scale,  $d$  the grain diameter, and  $L$  the wavelength. Parameters  $\beta$  and  $\alpha$  characterize the dispersion and nonlinearity of the medium and are given by

$$\beta = 4\mu M^3 \frac{1 + \nu}{(\lambda + 2\mu) \Lambda^2 d^2}, \quad \alpha = \varepsilon_0 \frac{3 + 2(A + 3B + C)}{\lambda + 2\mu}. \quad (16)$$

We anticipate that for (14) the dispersive effects are given by terms  $\tau \ddot{u}$  and  $\beta u_{xxxx}$ , and concentrating effects by  $\alpha u_x u_{xx}$ . We shall examine the balance between these effects.

For  $\alpha = 0$  and  $\tau = 0$  any solution of (14) can be represented as a superposition of Fourier components. Using the method of normal modes with harmonic independent components  $u = u_0 \exp(i(\omega t - kx))$ , with  $k$  the wave-number,  $\omega$  the angular frequency and  $\alpha = 0$  in (14) we obtain the dispersion relation which gives the frequency  $\omega$  as a function of the wave-number  $k$

$$\omega^2 - k^2 - \beta k^4 = 0. \quad (17)$$

From it we deduce the phase velocity  $\omega / k$

$$\omega^2 / k^2 = 1 + \beta k^2. \quad (18)$$

The dispersion of longitudinal waves can be either positive for  $\beta > 0$  or negative for  $\beta < 0$ . This depends on the nanostructure constant, i.e.  $\nu > -1$  for the first case and  $\nu < -1$  for the second. In negative-dispersion media the phase velocity  $\omega / k$  decreases with increasing wave number and in positive-dispersion media the phase velocity increases with increasing the wave number. The presence of nonlinear term in (14) and the non-vanishing parameter  $\tau$  change the aspect of the waves. In contrast to dispersion, nonlinearity leads to the concentration of the wave energy. For  $\tau = 0$  and a strong dispersion  $\beta k^4 \gg 1$ ,  $\Lambda \ll 1$  we are seeking for (14) waves of permanent shape and size by trying solutions such that

$$u(x, t) = u(\psi), \quad \psi = x - ct, \quad (19)$$

with constant wave velocity  $c$ . Solutions of (14) are given by

$$u(x, t) = a + \frac{3(c^2 - 1)}{\alpha} \tanh \left[ \frac{c^2 - 1}{-4\beta} \right]^{1/2} (x - ct), \quad (20)$$

where  $a$  and  $c > 1$  are arbitrary constants that can be determined from the initial or/and boundary conditions attached to (14). For a negative-dispersion media equation (20) is equivalent to the solution used by Taylor to describe the structure of a weak shock wave in a real fluid. This solution is a kink because its derivative with respect to the variable  $\psi$  is the known Boussinesq soliton expressed as a *sech*-squared solution [23]. The solution (20) is a localized entity, which may keep its entity in the field of propagation. The concentration of wave energy is described by the nonlinear term of (14). The balance or non-balance between the dispersion and the concentration effects depend on the mechanical property of the medium [24-27].

### 3. STATEMENT OF THE FOCUSING

The general solution of (1) and (2) may be written in the terms of the cnoidal representation [12].

We assume the longitudinal wave propagation in nanostructured medium so that in the  $x_3 = 0$  plane the displacements  $u_1 = u_2 = 0$  and  $u_3 \neq 0$  within a limited domain. Also we assume that in the medium we have  $|u_{1,2}| \ll |u_3|$ . For simplicity, we investigate the wave propagation in the half-space  $x_3 > 0$  medium with randomly distributed spherical grains. When the waves are propagating inside the half-space along the  $x_3$ -axis, the dissipation and dispersion effects with the presence of grains modeled as spherules, do not give a high order contribution to the equations for  $u_1$  and  $u_2$ , so we will consider only the equation for the longitudinal displacement  $u_3$  [12].

Let assume here that the general solution of (8) is a superposition of solitons

$$u_i = \sum_{n=1} U_n(x_1, x_2, x_3) \text{sech}^2 n(\omega t - kx_3 + \gamma_n), \quad i = 1, 2, 3, \quad (21)$$

where amplitudes  $U_n$  are functions of coordinates,  $\omega$  the cyclic frequency and  $k$  the wave number. For studying the focusing we consider the first-order approximations as

$$U_1 = U(x_1, x_2, x_3) \exp [kV(x_1, x_2, x_3)]. \quad (22)$$

It is convenient to work in cylindrical coordinates  $r, \theta, z$  (suppose all functions are uniform with respect to  $\theta$ ). Substituting (21) for  $n=1$  with (22) into (8) and neglecting the high order differentiation of  $U$  and  $V$ , we obtain

$$\begin{aligned} 2k^2 V_{,z} U + \bar{\alpha} V_{,r}^2 U - \bar{\alpha} (U_{,rr} + r^{-1} U_{,r}) &= -\bar{\beta} U^3, \\ 2k U U_{,z} + 2\bar{\alpha} V_{,r} U U_{,r} + U^2 \bar{\alpha} (V_{,rr} + r^{-1} V_{,r}) &= \bar{\beta} U^4, \end{aligned} \quad (23)$$

where  $\bar{\alpha}, \bar{\beta}$  are given by

$$\bar{\alpha} = \frac{\alpha}{k^2 \omega^2 (1 + \tau)}, \quad \bar{\beta} = \frac{\beta}{k^2 \omega^2 (1 + \tau)}. \quad (24)$$

For  $\tau = 0$ , equations (23) have the same form with similar equations found by Bagdoev and Shekoyan [12]. The solutions of (23) are sought in the form

$$V = 0.5 r^2 \hat{R}(z), \quad U^2 = \frac{U_0^2}{L^2} \exp \frac{-r^2}{L_0^2 L^2}, \quad (25)$$

where  $L(z)$  is the dimensionless width of the wave,  $L_0 = L(0)$  the dimensionless initial width of the wave,  $\hat{R}^{-1}(z)$  the variable radius of curvature of the wave front, and  $U_0$  the amplitude  $z=0$  ( $x_3 \equiv z$ ). Boundary conditions are

$$\hat{R}(0) = R^{-1}, \quad L(0) = 1. \quad (26)$$

Substituting (25) into (23) we obtain

$$L_{,zz} L^3 = \gamma, \quad L_{,z} = \hat{R} \bar{\alpha} L + \frac{\bar{\beta} U_0^2}{2kL}, \quad (27)$$

$$\gamma = \frac{16\bar{\alpha}^2}{k^2 L_0^4} - \frac{4k^2 L_0^2}{U_0^2 L_0^2 - 4\bar{\alpha}}, \quad 2\bar{\alpha} + \bar{\beta} U_0^2 = 0. \quad (28)$$

From (26) and (27) we obtain

$$L_{,z}(0) = \frac{\bar{\alpha}}{R} - \frac{\bar{\beta} U_0^2}{2k}, \quad (29)$$

$$L_{,z} = -\left[ L_{,z}^2(0) + \gamma(1 - L^{-2}) \right]^{1/2}. \quad (30)$$

The focusing is observed only for negative values of  $L_{,z}$ . If  $\gamma < 0$  and  $\bar{\beta} < 0$  the function  $L$  does not have an extremum. The function of wavelength  $L$  continuously decreases with  $z$  until it vanishes at a distance  $z_f$  called the focal point given by

$$z_f^{-1} = \sqrt{-\gamma} - L_{,z}(0). \quad (31)$$

If  $\gamma > 0$  and  $\bar{\beta} < 0$  the function  $L$  has a minimum. Therefore, the width of the wave is minimal at the focal point given by

$$z_f = -\frac{L_z(0)}{\gamma + L_z^2(0)}. \quad (32)$$

The width of the wave is

$$L_f^2 = \frac{\gamma}{\gamma + L_z^2(0)}. \quad (33)$$

When  $R \rightarrow \infty$ , we see from (29) that  $L_z < 0$  if  $\bar{\beta} > 0$ , so the self-focusing takes place. In conclusion, the solution  $u_3$  is obtained from (21)

$$\begin{aligned} u_3(r, z, t) &= U \exp(kV) \operatorname{sech}^2(\omega t - k z + \gamma_0) = \\ &= \left( \frac{U_0^2}{L^2} \exp \frac{-r^2}{L_0^2 L^2} \right)^{1/2} \exp[0.5k r^2 \hat{R}] \operatorname{sech}^2(\omega t - k z + \gamma_0), \end{aligned} \quad (34)$$

where  $L(z)$  and  $\hat{R}(z)$  verify (27). Fig. 1 shows the profiles of  $U/U_0$  for different values of  $L_0 [\mu\text{m}]$ . The wave  $u_3$  is calculated from (34) and plotted in Fig. 2 before focusing (a) and after focusing (b) for  $L_f = 2.5 \mu\text{m}$  and  $z_f = 8.4 \mu\text{m}$ . Fig. 3 shows a set of simulated displacement fields  $U/U_0$  through time in the self-focusing process. This result is important taking account the fact that the goal in focusing is to concentrate the wave energy at a specific time and location inside a medium. In seismology, the wave focusing is used to investigate the micro-seismic event location [28] or the reservoir monitoring [29].

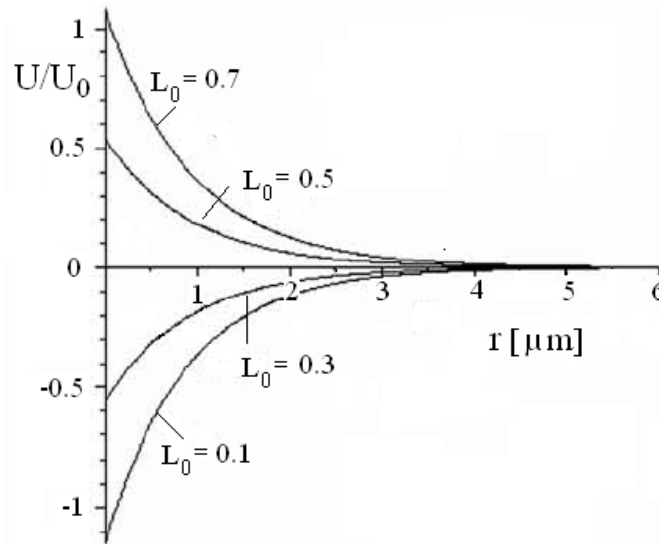


Fig. 1. Profiles of  $U/U_0$  for different  $L_0$ .

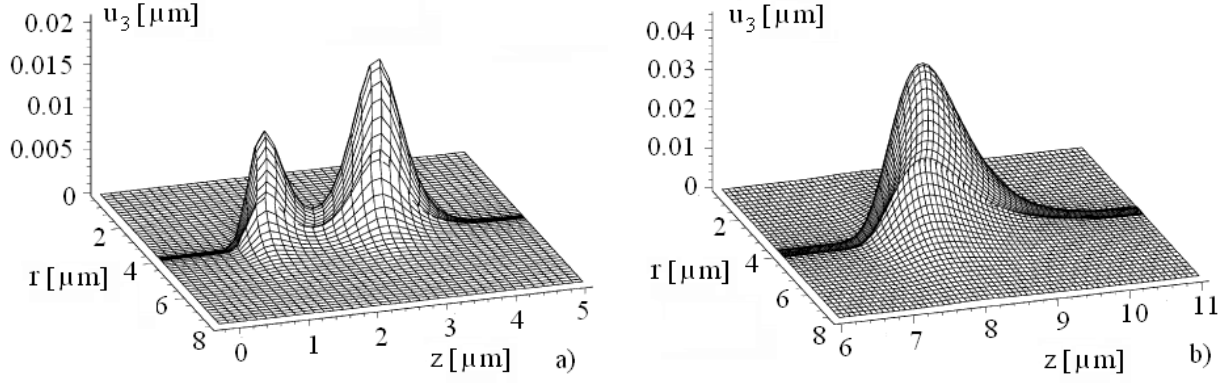


Fig. 2. Profile of  $u_3$  before (a) and after focusing (b).

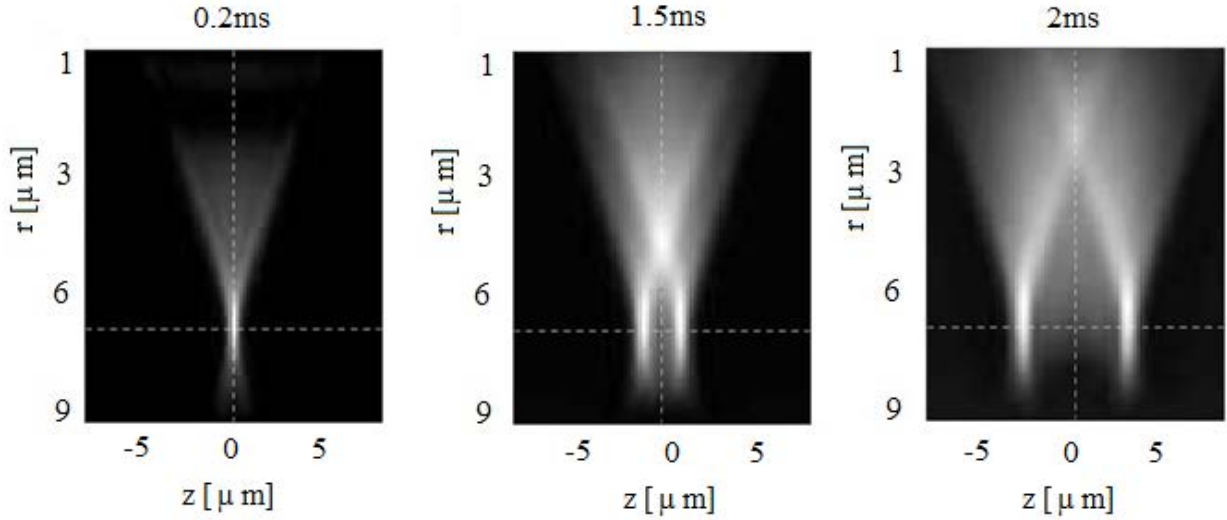


Fig. 3. Displacement fields  $U/U_0$  through time in the self-focusing process.

#### 4. CONCLUSIONS

In this paper, the focusing of ultrasonic waves in complex media at the femtosecond temporal and nano-meter spatial scale is described. The goal in focusing is to concentrate the wave energy at a specific time and location inside a medium. The motivation for this research is to improve existing techniques in focusing of waves, particularly where such techniques do not work well because of limitations inherent and unavoidable in real problems. The focusing waves phenomenon has applications in geophysics for focusing microevents such as seismic motions, in biomechanics, medical imaging, noninvasive surgery, nondestructive evaluation and so on.

The effect of internal structure in the ultrasonic wave propagation field is investigated using the couple stress theory, which incorporates the local deformations and rotations of internal grains, and the double couple radiation pattern, which introduce the radiation force which acts upon the body likewise a friction force.

The rate of work of this force is equals to the radiation of energy that leaves acoustically the body per unit time. In a natural way this theory gives rise the desired effects missing in the classical theory i.e. concentration of energy by focusing and self-focusing waves phenomena. It is found that the focusing depends directly on the sign of parameters describing dispersion and nonlinearity. In



negative-dispersion media waves are stable, while in positive-dispersion media they are unstable.

*Received on september20, 2017*

## REFERENCES

1. DREXLER, K. E., *Building molecular machine systems*, Trends in Biotechnology, 17, pp.5–7, 1999.
2. DREXLER, K.E., *Nanosystems: Molecular Machinery, Manufacturing, and Computation*, New York: John Wiley & Sons. (Association of American Publishers "Most Outstanding Computer Science Book"), 1992.
3. DREXLER, K.E., *Engines of Creation: The Coming Era of Nanotechnology*, New York: Anchor Press/ Doubleday, 1986.
4. DREXLER, K.E., *Molecular engineering: An approach to the development of general capabilities for molecular manipulation*, Proc. Natnl. Acad. Sci. U.S.A., **78**, pp.5275–5278, 1981.
5. DREXLER, K.E., PETERSON, C., PERGAMIT, G., *Unbounding the future: The nanotechnology revolution*, New York: William Morrow, 1991.
6. KO F.K., KHAN. S, ALI A., GOGOTSY Y, NEGUIB N, YANG G, LI C, SHIMODA Y, ZHAU O, BRONIKOWSKI M.J., SMALLEY R.E., WILLIS P.A., *Structure and properties of carbon nanotube reinforced nanocomposites*. AAIA-2002-1426: pp.1779–1787, 2002.
7. CHIROIU, V., ȘTIUCĂ, P., MUNTEANU, L., DONESCU, ȘT., *Introducere în nanomecanică*, Editura Academiei, 2005.
8. ERINGEN, A.C., *Theory of micropolar elasticity*, in Fracture, An Advanced Treatise, H. Liebowitz [Ed.], Academic Press, New York, pp.622–729, 1968.
9. ERINGEN, A.C., JAFADAR, C.B., *Polar field theories*, in: Continuum Physics, A. C. Eringen [Ed.], Academic Press, **4**, New York , pp.11–73, 1976.
10. EROFEEV, V.I., POTAPOV, A.I., *Nonlinear longitudinal waves in elastic media with couple stresses*, Soviet Physics Acoustics, **37**, 3, pp.417–592,1991.
11. POTAPOV, A.I., *Nonlinear strain waves in beams and plates*, Izd. Gorki Gos. Univ., Gorki, 1985.
12. BAGDOEV, A.G., SHEKOYAN, A.V., *Focusing of nonlinear ultrasonic waves in viscous thermoelastic materials with spherical inclusions*, Phys. Stat. Sol. A, **89**, pp.499–507, 1985.
13. PARFITT, V.R., ERINGEN, A.C., *Reflection of plane waves from the flat boundary of a micropolar elastic half-space*, J. of the Acoust. Soc. of America, **45**, 5, 1969.
14. CHIROIU, V., NICOLAE, V., *A rheonomic model for the dynamical analysis of the structure-soil interaction*, PVP- ASME: Fluid - Structure Interaction Transient Thermal -Hydraulics, and Structural Mechanics, **253**, pp.79–85,1993.
15. CHIROIU, V., NICOLAE, V., MUNTEANU, L., *Double-couple radiation pattern in seismology*, PVP- ASME: Natural Hazard Phenomena and Mitigation" **271**, pp.55-61, 1994.
16. CHIROIU, V., MUNTEANU, L., *About focusing in elastodynamics*, Rev. Roum. Sci. Techn. Méc.Appl., tome **42**, 3-4, pp.263–277, 1997.
17. MUNTEANU, L., *Analysis of focusing property of waves*, "Applied Sciences Especially Mechanics" of the Zeitschrift fuer Angewandte Mathematik und Mechanik with the Akademie Verlag, Berlin, 1996.
18. STOCKMAN, M.I., *Giant attosecond fluctuations of local optical fields in disordered nanostructured media*, Physical Review B, 62, 15, pp.10494–10497, 2000.
19. GHANASHYAM KRISHNA, M., SRINIVASAN, V., *A possible universal definition for the nanophase*, AIP Conf. Proc., **695**, p.108, 2003.
20. BERRUTI, T., DELSANTO, P.P., GOLA, M.M., SCALERANDI, M., *A microscopic model for acoustoelasticity*, EUROMAT94, 15th Conference on Material Testing in Metallurgy, Balatonszeplak, Hungary, 1994.
21. DELSANTO, P.P., Provenzano, V., Überal, H., *Coherency strain effects in metallic bilayers*, J. Phys.: Condens. Matter, **4**, pp.3915–3928, 1992.

22. JANKOWSKI, A.F., TSAKALAKOS, T., *The effect of strain on the elastic constants of noble metals*, J. Phys. F: Met. Phys., **15**, pp.1279–1292, 1985.
23. MUNTEANU, L., DONESCU, Ș.T., *Introduction to Soliton Theory: Applications to Mechanics*, Book Series “Fundamental Theories of Physics”, **143**, Kluwer Academic Publishers, 2004.
24. CHIROIU, V., DUMITRIU, D., MUNTEANU, L., BADEA, T., *About focusing in nanoelastodynamics*, Proc. of the Romanian Academy, series A, **7**, 3, pp.215–222, 2006.
25. MUNTEANU, L., CHIROIU, V., *Shell Buckling of Carbon Nanotubes Using Nanoindentation*, CMES: Computer Modeling in Engineering & Science, vol. 48, no.1, pp.27–41, 2009.
26. DELSANTO, P.P., MUNTEANU, L., CHIROIU, V., DONESCU, Ș.T., *On the nanotorsional pendulum*, Proc. of the Romanian Academy, Series A: Mathematics, Physics, Technical Sciences, Information Science, **10**, 2. pp. 173–178, 2009.
27. DONESCU, S. ILIE, R., RUGINA C., *On the higher harmonics of the Rayleigh-Lamb waves*, Romanian Journal of Mechanics Volume 2, Issue 2/2017, pp 11-20, 2017.
28. LU, R., WILLIS, M.E., *Locating microseismic events with time reversed acoustics: A synthetic case study*: SEG Technical Program Expanded Abstracts, 1342–1346, 2008.
29. XUAN, R., SAVA, P., *Probabilistic microearthquake location for reservoir monitoring*: Geophysics, 75, MA9–MA26, 2010.